


**VF Hanger Assembly** has a corrosion and maintenance-free design that supports plumbing and conduit pipes in a variety of applications from parking garage ceilings to trenched utilities below concrete structures.

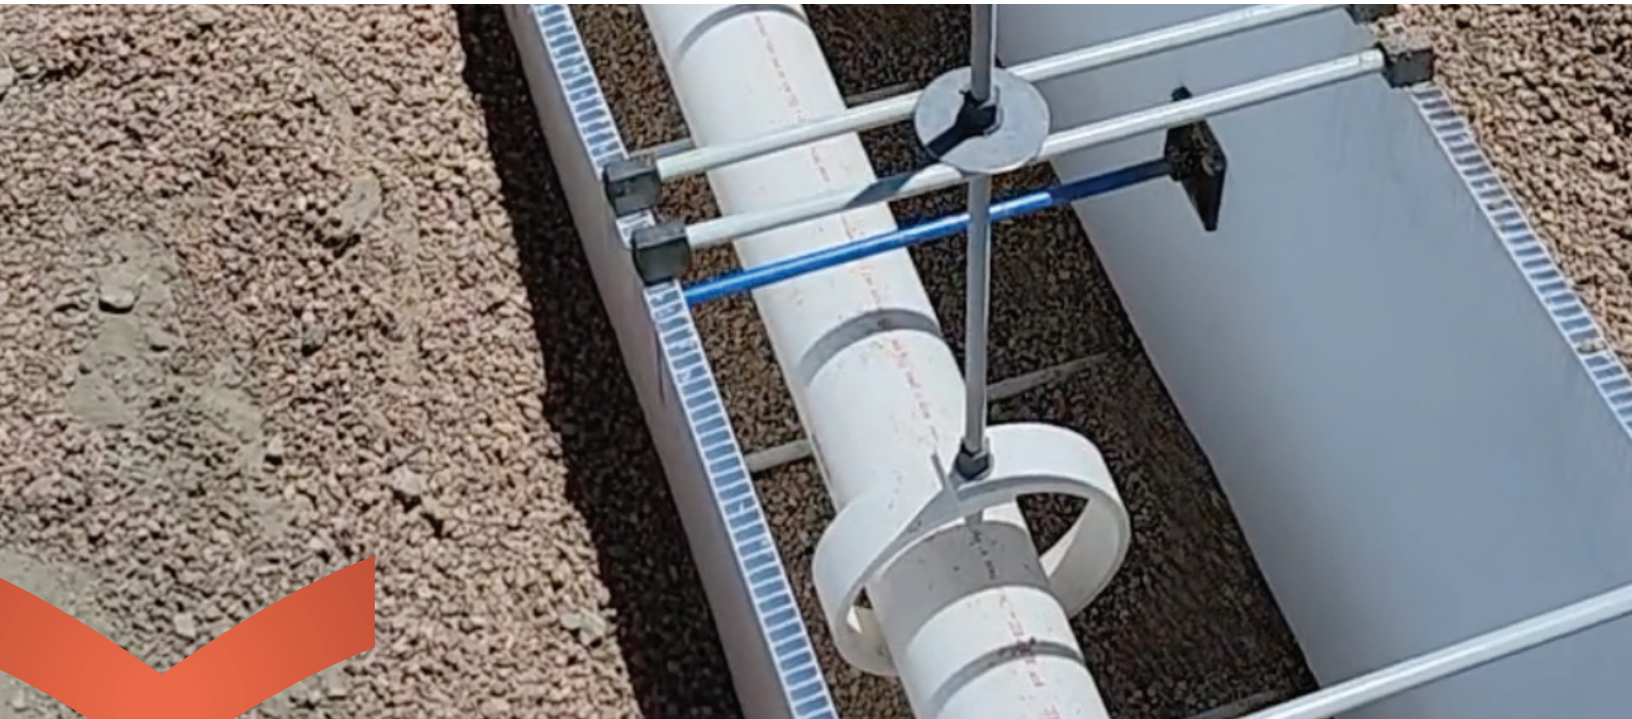

## KEY FEATURES

**Effective for a broad range of applications** including plumbing, HVAC, fire sprinkler systems, and other applications.

**Easy to install** with lightweight PVC hanger material and fiberglass threaded rods and nuts.

**Maintenance-free design** is constructed from nonmetallic materials that prevent corrosion and rusting.

**Modular system** accommodates design loads from 450 to 650 pounds and up to 10-inch pipe diameters.

**Protect your next plumbing or conduit project from damage.**

Contact us today for immediate assistance.

**888.704.VOID (8643)**  
**connect@voidform.com**

voidform.com

## Assembly Components



### Super Hanger™ PVC Pipe Hangers

| PART NUMBER | PIPE SIZE | HANGER SIZE | ROD DIMENSION | DESIGN LOAD* |
|-------------|-----------|-------------|---------------|--------------|
| SH002VFA    | 2 in      | 5 in        | 1/2 in        | 450 lbs      |
| SH003VFA    | 3 in      | 6 in        | 1/2 in        | 450 lbs      |
| SH004VFA    | 4 in      | 8 in        | 1/2 in        | 650 lbs      |
| SH006VF     | 6 in      | 10 in       | 1/2 in        | 650 lbs      |
| SH008VF     | 8 in      | 12 in       | 5/8 in        | 650 lbs      |
| SH010VF     | 10 in     | 14 in       | 5/8 in        | 650 lbs      |

\* Design loads are based on minimum ultimate hanger failure safety ratio of 3:1.



**Spacing:** Hanger spacing is typically 4-ft on center but may vary per code. (Please advise if spacing is not standard).

### Fiberglass Threaded Rods

Made from vinylester resin

| PART NUMBER | ROD SIZE      |
|-------------|---------------|
| TR500VF     | 1/2 in x 8 ft |
| TR625VF     | 5/8 in x 8 ft |
| TR750VF     | 3/4 in x 8 ft |
| TR1000VF    | 1 in x 8 ft   |




VF Hanger Assemblies work in a broad range of applications and are compatible with the PlumbingVoid® and Mudskipper® utility protection systems.

Learn more at [voidform.com](https://voidform.com)

### Hex Flange Nuts

Made from rigid thermoplastic polyurethane


| PART NUMBER | NUT SIZE |
|-------------|----------|
| FN500VF     | 1/2 in   |
| FN625VF     | 5/8 in   |
| FN750VF     | 3/4 in   |

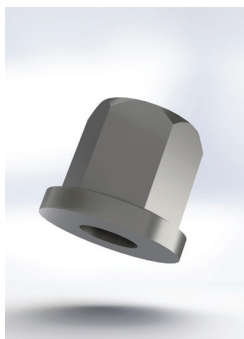

### Threaded Rod Couplers

Made from rigid thermoplastic polyurethane

| PART NUMBER | COUPLER SIZE |
|-------------|--------------|
| RC500VF     | 1/2 in       |
| RC625VF     | 5/8 in       |
| RC750VF     | 3/4 in       |

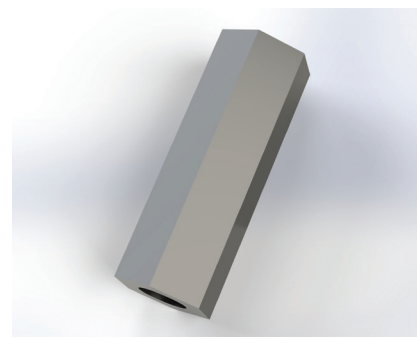

Have Questions? 888.704.VOID (8643) • [connect@voidform.com](mailto:connect@voidform.com) • [voidform.com](https://voidform.com)